


TX Chiller Builder Kits

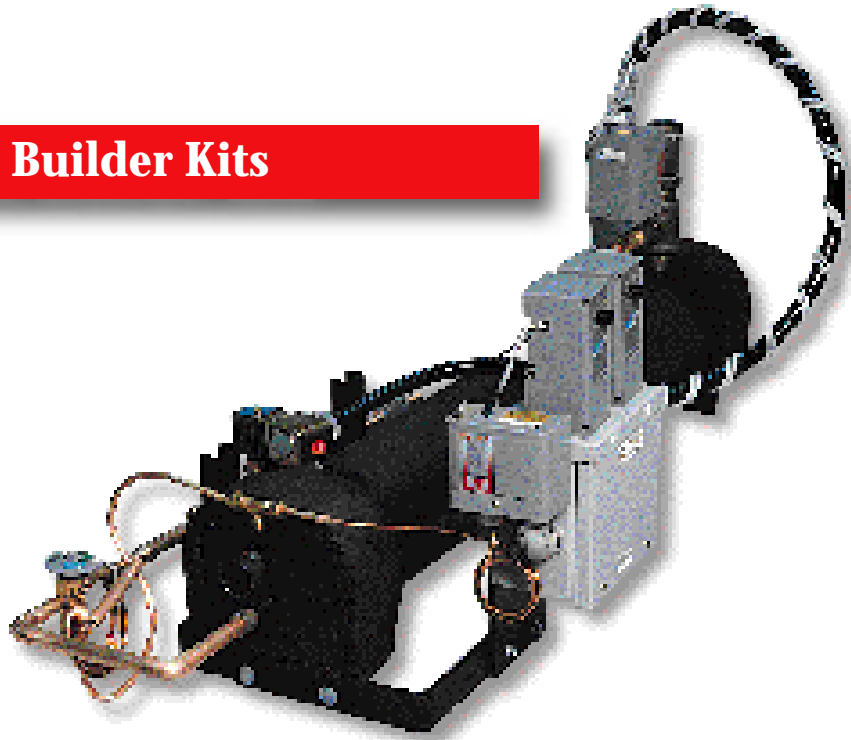

Standard Timesaver .

If you need an easy to assemble low side package that utilizes the smallest, most powerful, and most efficient chiller on the market, Standard Refrigeration's Chiller Builder Kit is what you're looking for.

- Uses super compact TX chiller barrel
- Brand name components
- Single or dual circuit options
- Available in ranges from two to 30 tons
- Entire kit can be assembled in less than one hour
- Available through one-stop shopping at your local wholesaler
- Another quality Standard Refrigeration product

Chiller Barrel sold separately.

Includes:

- framework
- control power supplies
- temperature controls
- frezestat
- low pressure switch
- flow switch
- expansion valve
- sight glasses
- solenoids
- custom piping



Standard
Refrigeration Company

708 345 5400

fax 708 345 3513

www.stanref.com

TX Chiller Builder Kit



Standard Refrigeration's ChillerBuilder Kits offer the contractor the opportunity to build a quality low-side air conditioning package in the field, using brand name components, quickly and inexpensively.

The kits, which offer single or dual-circuit options, are available in tonnage ranges from two to 30 tons for both commercial and industrial applications.

To ease installation, Standard has included in the kits framework, temperature controls, freestat, low pressure switch, expansion valve, sight glasses, solenoids

and custom piping. This pre-wired and pre-engineered system makes both ordering and assembly simple. All you need is a 120 volt power source and the condensing unit of your choice.

Assembly time is greatly reduced using the ChillerBuilder kits. An entire kit can be assembled in less than one hour, ready to be piped into a cooling system.

ChillerBuilder Kits are available through one-stop shopping at your local wholesaler. Chiller Barrel sold separately.

	SINGLE CIRCUIT KITS				DUAL CIRCUIT KITS	
	TX Kit 1	TX Kit 2	TX Kit 3	TX Kit 4	DTX Kit 10-12	DTX Kit 15-20
TONNAGE CAPACITIES*	1.5 thru 3.0	2.6 thru 6.0	5.0 thru 15.0	10.0 thru 30.0	5.0 thru 13.0	10.0 thru 30.0
STANDARD Chiller Barrel Options (Chillers sold separately)	TX2-1	TX3-1 TX4-1 TX5-1	TX6-1 TX7.5-1 TX10-1 TX12-1	TX15-1 TX20-1 TX25-1	TX10-2 TX12-2	TX15-2 TX20-2 TX25-2

120 Volts required to operate kits

Pumpdown cycle included with TX-Kit 4.

*Tonnage capacities based on TXV capacities at 35° F suction and 115° F condensing temperature using R-22.

For liquid/water line connection sizes and TX chiller barrel information please refer to the Standard Refrigeration Chiller Barrel Catalog.



Standard
Refrigeration Company

2050 North Ruby Street
Melrose Park, Illinois 60160-1133

www.stanref.com